




NTN BEARING CORP.

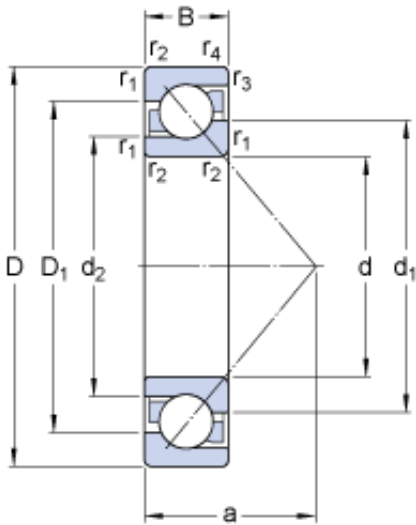

7310 BEGAPH Bearing 2D drawings and 3D CAD models

50 mm x 110 mm x 27 mm SKF 7310 BEGAPH angular contact ball bearings

Bearing No. 7310 BEGAPH

Size	110x50x27 mm
Bore Diameter	110 mm
Outer Diameter	50 mm
Width	27 mm
d	50 mm
D	110 mm
B	27 mm
d ₁	73.8 mm
d ₂	61.13 mm
D ₁	88.8 mm
a	47 mm
r _{1,2} - min.	2 mm
r _{3,4} - min.	1 mm
d _a - min.	61 mm
D _a - max.	99 mm
D _b - max.	104 mm
r _a - max.	2 mm
r _b - max.	1 mm
Basic dynamic load rating - C	75 kN
Basic static load rating - C ₀	51 kN
Fatigue load limit - P _u	2.2 kN
Reference speed	8000 r/min
Limiting speed	8000 r/min
Calculation factor - k _r	0.1



NTN BEARING CORP.

Calculation factor - k_a	1.6
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y_0	0.52
Calculation factor - Y_1	0.55
Calculation factor - Y_2	0.93
Calculation factor - X	0.35
Calculation factor - Y_0	0.26
Calculation factor - Y_1	
Calculation factor - Y_2	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	1.07
EAN	7316572839751
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	PEEK
Contact Angle	40 Degree
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Preload	Light
Mounting Arrangement	Universal



NTN BEARING CORP.

Inch - Metric	Metric
Long Description	50MM Bore; 110MM Outside Diameter; 27MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; PEEK Cage; 40 Degree; 1 (Single); L
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	7310 BEGAPH
Width	1.063 Inch 27 Millimeter
Bore	1.969 Inch 50 Millimeter
Outside Diameter	4.331 Inch 110 Millimeter
d_1	73.8 mm
d_2	61.13 mm
D_1	88.8 mm
$r_{1,2}$ min.	2 mm
$r_{3,4}$ min.	1 mm
d_a min.	61 mm
D_a max.	99 mm
D_b max.	104 mm
r_a max.	2 mm
r_b max.	1 mm
Basic dynamic load rating C	75 kN
Basic static load rating C_0	51 kN
Fatigue load limit P_u	2.16 kN
Calculation factor A	0.0418



NTN BEARING CORP.

Calculation factor k_r	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor Y_0	0.26
Calculation factor Y_2	0.57
Calculation factor X	0.57
Calculation factor Y_0	0.52
Calculation factor Y_1	0.55
Calculation factor Y_2	0.93
Mass bearing	1.1 kg